

# Geomechanical research for the new bucket wheel excavator testing at Open pit “Filijala”

Vladimir Čebašek, Nebojša Gojković, Veljko Rupar, Miodrag Pribičević



Дигитални репозиторијум Рударско-геолошког факултета Универзитета у Београду

[ДР РГФ]

Geomechanical research for the new bucket wheel excavator testing at Open pit “Filijala” | Vladimir Čebašek, Nebojša Gojković, Veljko Rupar, Miodrag Pribičević | Рударски гласник; Bulletin of mines | 2020 | |

10.25075/BM.2020.07

<http://dr.rgf.bg.ac.rs/s/repo/item/0007129>

Дигитални репозиторијум Рударско-геолошког факултета Универзитета у Београду омогућава приступ издањима Факултета и радovima запослених доступним у слободном приступу. - Претрага репозиторијума доступна је на [www.dr.rgf.bg.ac.rs](http://www.dr.rgf.bg.ac.rs)

The Digital repository of The University of Belgrade Faculty of Mining and Geology archives faculty publications available in open access, as well as the employees' publications. - The Repository is available at: [www.dr.rgf.bg.ac.rs](http://www.dr.rgf.bg.ac.rs)

## GEOMECHANICAL RESEARCH FOR THE NEW BUCKET WHEEL EXCAVATOR TESTING AT OPEN PIT “FILIJALA”

DOI: 10.25075/BM.2020.07

Vladimir Čebašek, Nebojša Gojković,  
 Veljko Rupar, Miodrag Pribičević

FACULTY OF MINING AND GEOLOGY, UNIVERSITY OF BELGRADE, SERBIA  
*vladimir.cebasek@rgf.bg.ac.rs*

**Abstract:** *Since 1976 cement marl excavation at open-pit mine „Filijala” is carried out by continuous exploitation technology using bucket wheel excavator SH 400 manufactured by Orenstein und Koppel (O & K) company. Due to the bucket wheel excavator time-worn and high operating cost it was necessary to replace it with new one. In order to test the new bucket wheel excavator and prove its capacity a testing zone was defined as test block for excavation, in which the bucket wheel excavator testing will be conducted. In the test block area detailed investigations were carried out which included laboratory testing in order to determine the value of material cutting resistance.*

**Keywords:** *cutting resistance, marl, bucket wheel excavator*

### INTRODUCTION

The cement marls deposit „Filijala” is the main source of the basic raw material for the cement factory today. It has been known since 1838, and its exploitation works began in 1869 where the open-pit mine „Filijala” was developed. This deposit consists of three mining areas of unequal size and degree of exploitation called: „Severno polje”, „Srednje polje” or „Međupolje” i „Južno polje”(Ganić M. et al., 2012).

The cement marl basic technology of exploitation is continuous with the use of a bucket wheel excavator. Due to the conditions in the deposit, especially due to the quality of marl, it is not possible to apply exclusively continuous technology, so the discontinuous exploitation technology is used as well. Discontinuous technology is used for the exploitation in parts of deposits where the bucket wheel excavator can't operate, as well as for simultaneous excavation from both technologies in order to homogenize the quality of the

cement marl. Marl continuous exploitation technology is carried out by a bucket wheel excavator model SH 400, which was produced by the company Orenstein und Koppel (O & K) and has been in operation since 1976. Picture of this excavator in operation at open-pit mine is given in Figure 1.

Lafarge Beočin cement factory management decided to purchase a new bucket wheel excavator, due to the time-worn of the existing rotor excavator. Based on the technical specifications provided by LBFC mining engineers and technicians, a bucket wheel excavator with a working name „new bucket wheel excavator” has been designed, built and delivered. After completing the installation of a new bucket wheel excavator, it is necessary to carry out its testing, which, among other things, includes the proving of the exploitation capacity. For the purpose of testing a new bucket wheel ex-

cavator and proving its capacity, a digging test block is defined, in which the testing will be carried out.

At the open-pit mine „Filijala” test block location a detailed research program was carried out which covered both field investigations and geomechanical laboratory tests. Results of this research will serve as a basis for new bucket wheel excavator testing and proving its exploitation capacity.

## FIELD INVESTIGATIONS

Field investigation included the exploratory borehole drilling from which core was collected and mapped. A total of sixteen boreholes were drilled at the open-pit mine „Filijala” test block zone. The spatial positions of the exploratory boreholes are shown at the map in Figure 1.



Figure 1, The “old” bucket wheel excavator SH 400.



Figure 2, The “new” bucket wheel excavator.

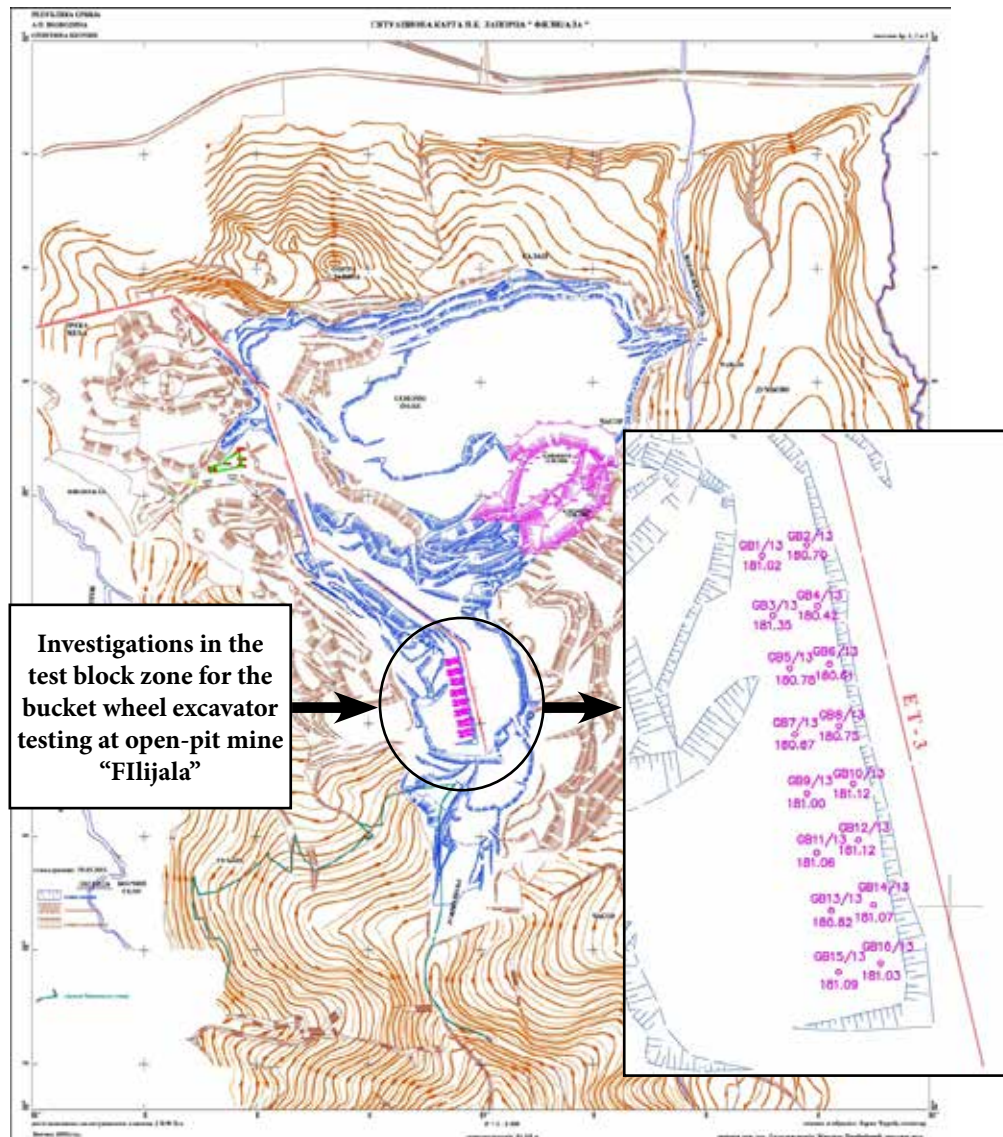


Figure 3, Disposition of investigations in the test block zone at open-pit mine “Filijala”.

Exploratory drilling is performed by rotary drilling machine with continuous coring. For these purposes, GAK-300 drilling rig with all associated equipment was used. During the drilling itself, detailed geoenvironmental and hydrogeological mapping of the collected core was carried out. The results of the core mapping allowed the selection of rock material representative samples, after that the representative samples were labeled and packed for geomechanical laboratory testing. The aim of the conducted field research was to determine the geological structure of the micro-location of the zone and to select and collect the rock material samples for laboratory testing. Boreholes and samples

basic data are given in Table 1 (Gojković N. et al., 2013).

#### LABORATORY TESTING OF PHYSICAL AND TECHNICAL PROPERTIES OF ROCK MATERIAL

Total of 23 rock material samples were collected from open-pit mine „Filijala” test block zone and delivered to Laboratory for rock mechanics at Faculty of Mining and Geology. All samples belong to a group of gray marl. On these samples the laboratory testing was carried out in order to determine the physical and technical properties, such as: the unit weight  $\gamma$ , the water



Table 1, Basic data on exploratory boreholes

Label	Borehole			No.	Samples	
	Coordinates				Depth	
	Y (m)	X (m)	Z (m)		From	To
BGF-01/13	7400928.87	50066333.1	181.02	2	1.30	2.50
					5.35	6.60
BGF-02/13	7400945.80	5006637.10	180.70	2	1.30	2.60
					5.40	6.50
BGF-03/13	7400932.97	5006610.38	181.35	1	3.40	4.60
BGF-04/13	7400949.93	5006614.09	180.42	1	3.40	4.60
BGF-05/13	7400939.38	5006590.47	180.88	2	1.50	2.55
					5.40	6.60
BGF-06/13	7400954.49	5006592.07	180.61	2	1.40	2.60
					5.40	6.60
BGF-07/13	7400941.30	5006565.33	180.87	1	1.80	6.20
BGF-08/13	7400958.09	5006568.56	180.75	1	3.20	4.60
BGF-09/13	7400945.93	5006543.00	181.00	2	1.50	2.60
					5.40	6.60
BGF-10/13	7400963.43	5006546.72	181.12	2	1.40	2.60
					5.45	6.65
BGF-11/13	7400949.60	5006520.46	181.06	1	3.40	4.70
BGF-12/13	7400965.44	5006525.28	181.12	1	3.40	4.60
BGF-13/13	7400955.14	5006498.53	180.82	1	1.90	6.25
BGF-14/13	7400971.16	5006500.67	181.06	2	1.45	2.70
					5.40	6.60
BGF-15/13	7400957.86	5006475.17	181.08	1	3.40	4.60
BGF-16/13	7400973.83	5006478.51	181.02	1	3.40	4.55

content  $\omega$ , the cutting resistance per unit of cutting edge length engaged  $K_L$  and the cutting resistance per unit of slice cross-sectional area  $K_F$ .

Physical and technical properties laboratory testing was performed in total of: 111 unit weight tests with paraffin (SRPS U.B1.017), 111 water content tests (SRPS U.B1.012) and 111 tests for determining the cutting resistance per unit of cutting edge length engaged and per unit of slice cross-sectional area. Marl cutting resistance testing of the was performed according to wedge test method proposed by Orenstein und Koppel (Durst W., Vogt W, 1988, Raaz V., 1999). The borehole labels and the number of samples from each borehole for laboratory testing are shown in Table 2.

## CUTTING RESISTANCE

Gray marl cutting resistance was determined according the wedge test method proposed by Orenstein und Koppel. For this purpose, a specially constructed wedge was used for the breaking of marl test bodies. This wedge has angle of  $34^\circ$ , the glossy top of  $b = 5$  mm with blade length of  $l = 65$  mm and its schematic representation and appearance is given in Figures 4 and 5 (Radojević J., 1979, Radojević J., 1992).

According to the original test method the wedge is installed into a suitable hydraulic press which is used for vertical force applying. The vertical force increases constantly until the specimen fracture. During the tests, the force value which led to specimen fracture and wedge penetration depth into the specimen were determined.

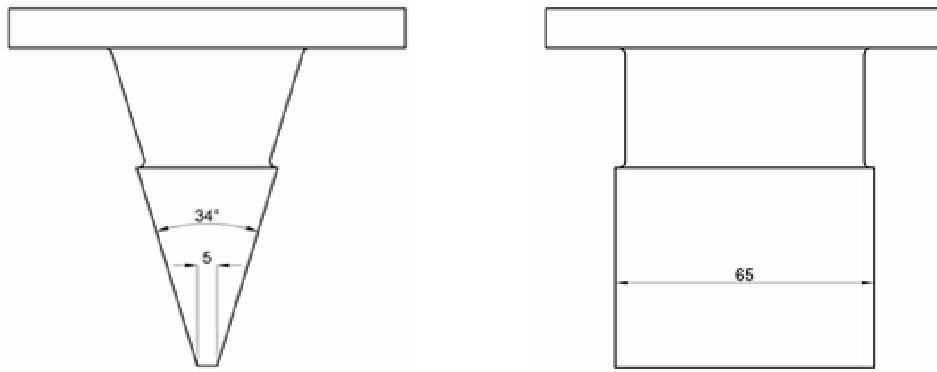


Figure 4, Schematic representation of wedge that was used for cutting resistance testing.

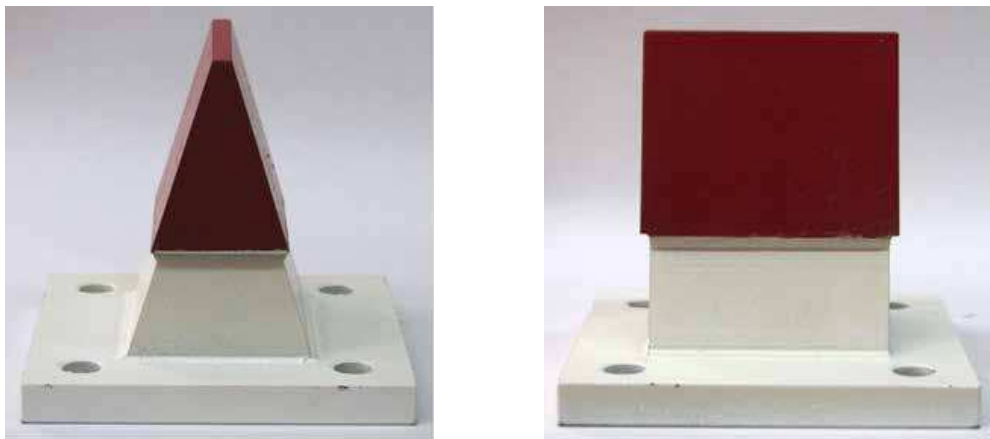


Figure 5, Appearance of wedge that was used for cutting resistance testing.

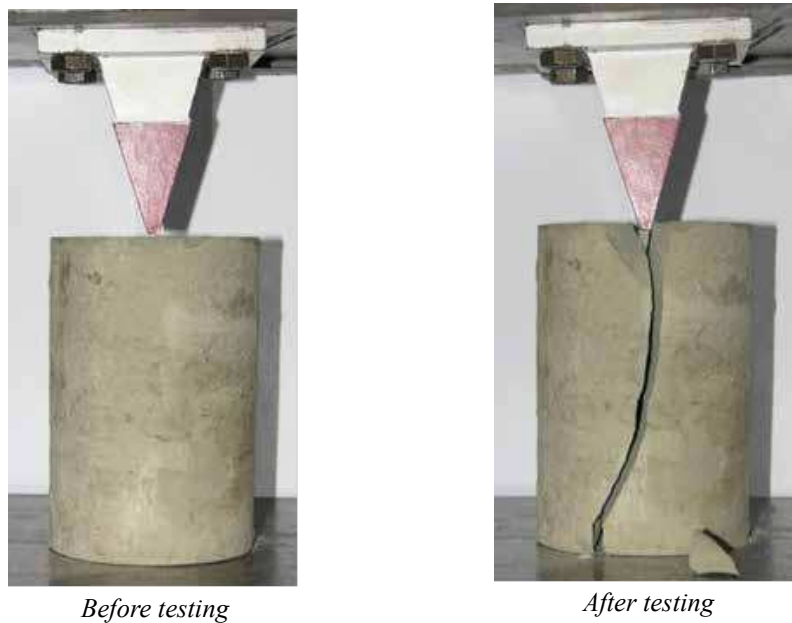


Figure 6, Testing body appearance before and after cutting resistance testing.

After testing, the rock material water content for each test specimen was determined. The water content tests were carried out according to the standard testing procedure using an electric dryer (SRPS U.B1.012).

Specific cutting resistance per unit of cutting edge length engaged  $K_L$  and the cutting resistance per unit of slice cross-sectional area  $K_F$  values are calculated according to the following equations:

$$K_L = \frac{P}{d} \quad (\text{N/cm}^{\cdot}) \quad \& \quad K_F = \frac{P}{F} \quad (\text{N/cm}^2),$$

where: P – breaking force (N),  
 d – diameter of sample (cm`),  
 F – specimens cross-section area (cm<sup>2</sup>).

## ANALYSIS OF THE LABORATORY TESTS RESULTS

A total of 23 gray marl samples were collected from exploratory boreholes for laboratory testing of cutting resistance. Overview of tested rock material (gray marl) samples physical and technical properties mean values is given in Table 2.

The text that follows provides an detailed statistical analyses of rock material (marl) physical and technical properties testing result. The results of statistical analyses are given in the form of overview, tables and corresponding graphic representations.

Table 2, Overview of the rock material samples physical and technical properties mean values

Sample label	No. of testing bobbies	Unit weighg $\gamma$ (kN/m <sup>3</sup> )	Water content w (%)	Mean value of digging force $K_L$ (N/cm`)	Mean value of digging force $K_F$ (N/cm <sup>2</sup> )
BGF - 1/13(1.30 – 2.50)	5	19.32	27.15	649.49	28.70
BGF - 1/13(5.35 – 6.60)	5	19.23	26.49	639.29	28.37
BGF - 2/13(1.30 – 2.60)	5	18.55	23.88	667.84	29.62
BGF - 2/13(5.40 – 6.50)	5	17.65	26.36	650.50	28.35
BGF - 3/13(3.40 – 4.60)	5	18.32	26.19	651.52	28.30
BGF - 4/13(3.40 – 4.60)	5	18.06	26.17	650.50	28.45
BGF - 5/13(1.50 – 2.55)	5	19.48	26.01	652.54	29.78
BGF - 5/13(5.40 – 6.60)	5	18.94	26.07	653.56	28.24
BGF - 6/13(1.40 – 2.60)	5	18.97	25.76	655.60	29.72
BGF - 6/13(5.40 – 6.60)	5	18.96	25.83	654.58	28.13
BGF - 7/13 (1.80 – 6.20)	3	18.58	25.18	655.94	27.27
BGF - 8/13(3.20 – 4.60)	5	19.35	25.56	652.54	28.54
BGF - 9/13(1.50 – 2.60)	5	18.00	25.52	656.62	28.12
BGF - 9/13(5.40 – 6.60)	5	17.80	25.65	655.60	28.05
BGF - 10/13(1.40 – 2.60)	5	18.93	25.24	658.66	29.80
BGF - 10/13(5.45 – 6.65)	5	18.48	25.49	654.58	28.41
BGF - 11/13(3.40 – 4.70)	5	18.08	25.04	657.64	29.29
BGF - 12/13(3.40 – 4.60)	5	18.65	24.96	656.62	29.35
BGF - 13/13 (1.90 – 6.25)	3	18.08	24.70	659.34	27.73
BGF - 14/13(1.45 – 2.70)	5	17.84	24.64	661.72	29.59
BGF - 14/13(5.40 – 6.70)	5	18.32	24.70	662.74	28.37
BGF - 15/13(3.40 – 4.60)	5	18.02	24.61	660.70	29.11
BGF - 16/13(3.40 – 4.55)	5	17.89	24.53	663.76	29.82

## UNIT WEIGHT


The unit weight  $\gamma$  was determined on five test body from each cutting resistance laboratory testing specimen. The results of unit weight testing were statistically analyzed. Total of 111 data were analyzed and statistical parameters are shown in Table 3 and Figures 7a and 7b.

## WATER CONTENT


The water content  $w$  was determined on five test bodies from each cutting resistance laboratory testing specimen. The results of water content testing were statistically analyzed. Total of 111 data were analyzed and statistical parameters are shown in Table 4 and Figures 8a and 8b.

Table 3, Overview of statistical parameters of the rock material unit weight testing results

<b>Statistical parameters</b>	<b>Value</b>
Number of data	111
Minimum value	17.51
Maximum value	19.71
Value interval	2.200
Sum of all values	2054.16
Average	18.506
Variance	0.329
Mean square deviation	0.574
Standard error	0.054

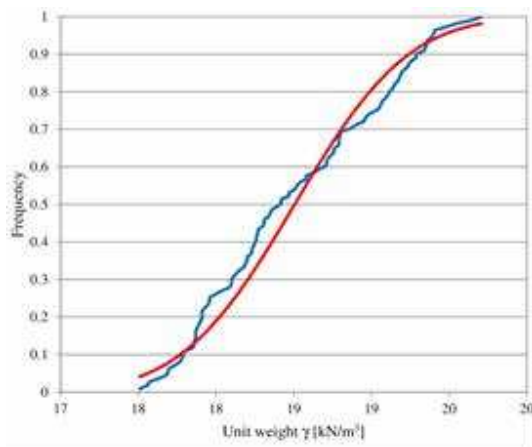

a)

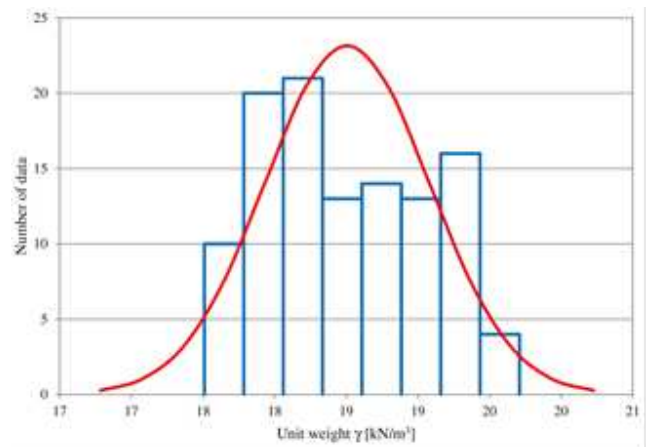


b)

Figure 7, Cumulative curve (a) histogram and normal distribution, (b) of the unit weight  $\gamma$  testing results.



Table 4, Overview of statistical parameters of the rock material water content  $w$  testing results

Statistical parameters	Value
Number of data	111
Minimum value	23.55
Maximum value	27.30
Value interval	3.750
Sum of all values	2828.610
Average	25.483
Variance	0.621
Mean square deviation	0.788
Standard error	0.075

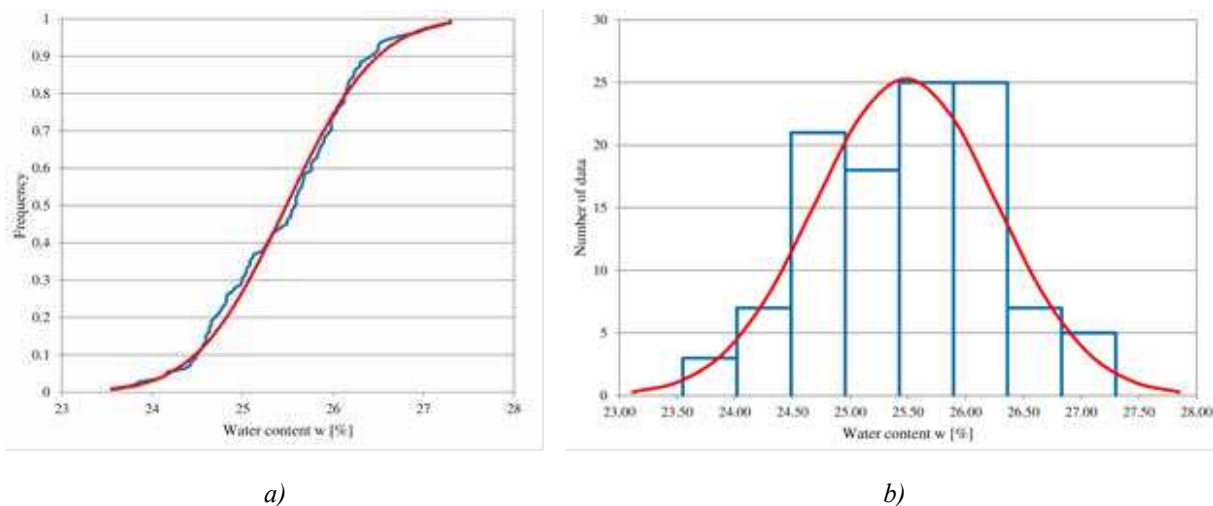

a)

b)

Figure 8, Cumulative curve (a) histogram and normal distribution, (b) of the water content  $w$  testing results.

## CUTTING RESISTANCE

The laboratory testing of cutting resistance was carried out on five test bodies from each testing specimen. The results of samples cutting resistance testing (cutting edge  $K_L$  i cross-sectional  $K_F$ ) were statistically analyzed. Total of 111 data were analyzed and all important statistical parameters are shown in Table 5.

The cutting resistance per unit of cutting edge length engaged values ranged from  $K_L = 591.37$  to  $718.82$  N/cm, while the average values of this parameter ranged from  $K_L = 639.29$  to  $667.84$  N/cm and are shown in Table 2 - overview of the samples physical and technical properties. The results of testing the cutting resistance per unit of cutting edge length engaged  $K_L$  (111 data)

were statistically analyzed and statistical parameters are shown in Table 5. The graphic interpretation of the results of this analysis is shown in Figures 9a and 9b.

The values of the cutting resistance per unit of slice cross-sectional area ranged from  $K_F = 24.86$  to  $32.89$  N/cm<sup>2</sup>, while the average values of this parameter ranged from  $K_F = 28.05$  to  $29.82$  N/cm<sup>2</sup> for tested samples and are shown in a in Table 2 - overview of the samples physical and technical properties. The results of testing the cutting resistance per unit of slice cross-sectional area  $K_F$  (111 data) were statistically analyzed and statistical parameters are shown in Table 5. The graphic interpretation of the results of this analysis is shown in Figures 10a and 10b.

Table 5, Overview of statistical parameters of the rock material cutting resistance testing results

Statistical parameters	Specific cutting resistance per unit of cutting edge length engaged $K_L$	Specific cutting resistance per unit of slice cross-sectional area $K_F$
Number of data	111	111
Minimum value	591.37	24.86
Maximum value	718.82	32.89
Value interval	127.450	8.030
Sum of all values	72835.130	3198.180
Average	656.172	28.812
Variance	1023.248	2.467
Mean square deviation	31.988	1.571
Standard error	3.036	0.149

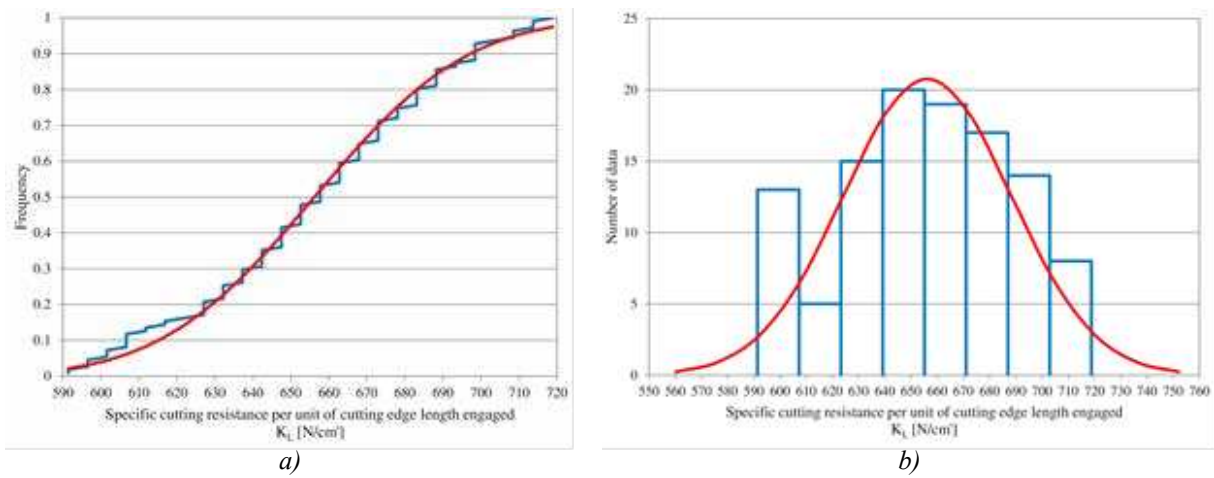


Figure 9, Cumulative curve (a) histogram and normal distribution, (b) of the cutting resistance per unit of cutting edge length engaged  $K_L$  testing results.

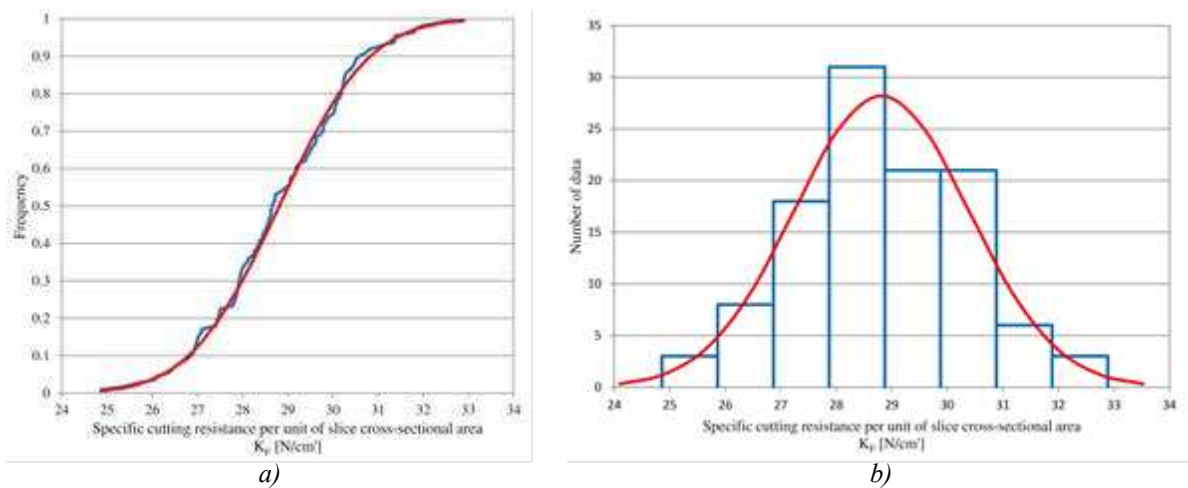


Figure 10, Cumulative curve (a) histogram and normal distribution, (b) of the cutting resistance per unit of slice cross-sectional area  $K_F$  testing results.

## CONCLUSION

Purpose of the research presented in this paper is to carry out cutting resistance laboratory testing on rock material (gray marl) samples. Samples were collected from boreholes at open-pit »Filijala« site. Laboratory testing results should serve to evaluate bucket wheel excavator cutting resistance at the moment of testing and proving its exploitation capacity.

In order to prove the excavator exploitation capacity, a test block zone is determined where the new bucket wheel excavator testing will be carried out. Detailed research of the test block micro-location at open-pit mine »Filijala» was carried out with the aim to determine the geological structure at test block zone and select rock material representative samples for cutting resistance laboratory testing. In this area at open-pit mine »Filijala», a total of 16 exploratory boreholes were drilled, out of which 23 gray marl samples were collected. On the above-mentioned rock material (marl) samples, physical and technical properties were tested such as: unit weight  $\gamma$ , water content  $w$ , specific cutting resistance per unit of cutting edge length engaged  $K_L$  and specific cutting resistance per unit of slice cross-sectional area  $K_F$ . Laboratory tests covered a total of: 111 unit weight tests with paraffin (SRPS U.B1.017), 111 water content tests (SRPS U.B1.012) and 111 tests for determining specific cutting edge  $i$  cross-sectional cutting resistance (Orenstein und Koppel method).

The values of the rock material (gray marl) specific cutting resistance per unit of cutting edge length engaged  $K_L$  ranged from  $K_L = 591.37$  to  $718.82$  N/cm, while the values of specific cutting resistance per unit of slice cross-sectional area  $K_F$  ranged from  $K_F = 24.86$  to  $32.89$  N/cm<sup>2</sup>. The technical documentation for the purchase of a bucket wheel excavator required the specific line-cut digging force  $K_L$  of  $715.00$  N/cm. By

analyzing the laboratory tests results it can be noticed that only one specific cutting resistance ( $K_L = 718.82$  N/cm) test has a higher value than the defined value of  $715$  N/cm. According to the previous one, it can be concluded that the defined test block zone fully meets the conditions for testing the bucket wheel excavator in order to prove its capacity.

## REFERENCES

1. Čebašek V. et al., Assessment Of The Digging Force For Underwater Coal Mining, In: Proceedings of 7th Balkan Mining Congress BALKANMINE, Univerzitet u Banjoj Luci - Rudarski fakultet u Prijedoru, I, Prijedor, 11. - 13. Oct, 2017, pp. 279 – 286.
2. Durst W., Vogt W, Bucket Wheel Excavator, Clausthal-Zellerfeld, Federal Republic of Germany, Trans Tech Publications, 1988.
3. Ganić M. et al., Geološki i inženjersko-geološki uslovi formiranja klizišta u cementnim laporacima na PK »Filijala«, Beočin, Beograd, Podzemni radovi, 20, 2012, pp. 47-59.
4. Gojković N. et al., Izveštaj o određivanju specifičnog otpora rezanja na lokalitetu površinskog kopa »Filijala« na uzorcima iz zone bloka za testiranje novog rotornog bagera, Beograd, Univerzitet u Beogradu, Rudarsko-geološki fakultet, 2013.
5. Raaz V., Assessment of the Digging Force and Optimum Selection of the Mechanical and Operational Parameters of Bucket Wheel Excavators for Mining of Overburden, Coal and Partings, Esen, Krupp Fordertechnik, 1999.
6. Radojević J., Optimizacija brzina i u glova rezanja rotornim bagerima u odnosu na utrošenu energiju i instalisanu snagu mašine. doktorska disertacija, Beograd, Univerzitet u Beogradu, Rudarsko-geološki fakultet, 1979.
7. Radojević J., Mehanika stena, Beograd, Univerzitet u Beogradu, Rudarsko-geološki fakultet, 1992.